

FLEP__-U

Union Copla para conduit flexible plástico


Material: nylon PA6.

Temperatura en operación: -40 °C a 100 °C

Grado de protección: IP54

Grado de prueba de fuego: UL94-V2

CAT #	BG1	BG2	B1	B2	H
	(mm)				
FLEP10-U	10.5	10.5	17.7	17.7	34
FLEP19-U	18.8	18.8	27	27	48.5
FLEP25-U	25.5	25.5	33.3	33.3	48.6
FLEP55-U	55.2	55.2	63	63	71

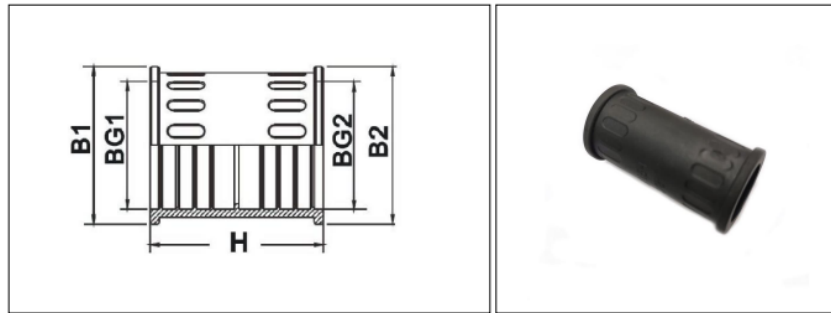

FLEP10-U



FLEP19-U



FLEP25-U



FLEP55-U